



CUT ALONG THE LINE

aviloo.com

connect to detect.

AVILOO FLASH TEST

FOLD HERE



VERSION 10/24

AVILOO FLASH TEST

FOLD HERE



aviloo.com/manuals

This case contains an AVILOO box and accessories for carrying out AVILOO tests.
The box and accessories remain the property of AVILOO GmbH and are provided on loan.



Short instructions for the AVILOO FLASH Test – test the drive battery in 3 simple steps

CAUTION:
Make sure the vehicle is not charging.

1 FLASH TEST SET UP

- Open the driver's door (leave it open during the test).
- **VW, Skoda, Cupra and Seat Models:** unlock the hood before plugging in the AVILOO Box (it is not necessary to open it).
- Plug the AVILOO Box into the OBD-2-port.
- Start the vehicle and leave the vehicle in park mode so that the systems necessary for the test remain active.
- Turn off the heating and air conditioning.
- **TIP:** The AVILOO WebAPP helps you locate the OBD-2-port in the vehicle.

2 PERFORM FLASH TEST

- Wait for the yellow flashing one LED indicating that the AVILOO Box is ready for the Flash Test.
- Fasten the driver's seatbelt to keep the systems necessary for the test active.
- **Note for all Tesla Models:** switch the vehicle to drive mode and keep your foot on the brake to prevent the vehicle from moving (due to the lack of an "ignition").
- Wait for the solid green LED, which indicates that the FLASH Test is complete.


3 END OF FLASH TEST


- Turn off the vehicle.
- Unbuckle the seat belt.
- Unplug the AVILOO Box.
- Close the driver's door and, if necessary, the hood.
- The AVILOO FLASH Test Report is sent by email to the email address stored for this AVILOO Box.


Please note:
Changes or modifications not expressly approved by Aviloo could void the user's authority to operate the equipment.
This is a mobile device and the user must ensure that they maintain a distance of 20 cm during operation.


FOLD HERE


AVILOO BOX LED-DISPLAY

 Flashing blue: indicates that the box is booting up.

 Yellow light: test in progress.


 **If red lights up:** FLASH Test failed (see notes at bottom right).

 Flashing green: data transfer.

 Green light: Test completed.

FOLD HERE

DISPLAY IN THE AVILOO WEBAPP

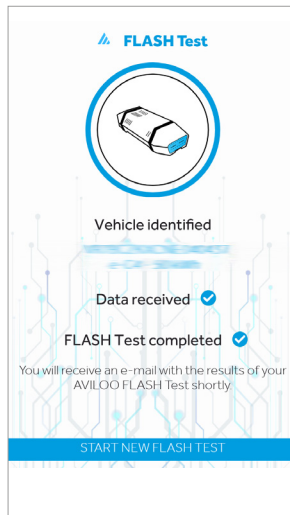

IMPORTANT NOTES:

- To keep the software up to date, leave the box plugged into the power supply when not in use.
- Red LED means: FLASH Test failed.

Take the following measures:



1. Check at <https://aviloo.link/database> whether the vehicle can be tested.
2. Repeat the FLASH Test according to the instructions.
3. Contact AVILOO Customer Support.