

Short instructions for the AVILOO FLASH Test

– test the drive battery in 3 simple steps

CAUTION:
Make sure the
vehicle is not
charging.

1 FLASH TEST SET UP


- Open the driver's door (leave it open during the test).
- **VW, Skoda, Cupra and Seat Models:** unlock the hood before plugging in the AVILOO Box (it is not necessary to open it).
- Plug the AVILOO Box into the OBD-2-port.
- Start the vehicle and leave the vehicle in park mode so that the systems necessary for the test remain active.
- Turn off the heating and air conditioning.
- **TIP:** The AVILOO WebAPP helps you locate the OBD-2-port in the vehicle.

AVILOO BOX LED-DISPLAY



Flashing blue:
indicates that the box
is booting up.

DISPLAY IN THE AVILOO WEBAPP

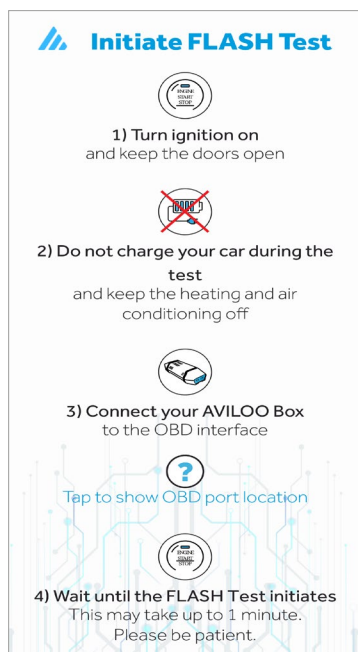

2 PERFORM THE FLASH TEST

- Wait for the yellow flashing one LED indicating that the AVILOO Box is ready for the FLASH Test.
- Fasten the driver's seatbelt to keep the systems necessary for the test active.
- **Note for all Tesla Models:** switch the vehicle to drive mode and keep your foot on the brake to prevent the vehicle from moving (due to the lack of an "ignition").
- Wait for the solid green LED, which indicates that the FLASH Test is complete.



Yellow light:
Test in progress.



If red lights up:
FLASH Test failed (see
notes at bottom right).

3 END OF THE FLASH TEST

- Turn off the vehicle.
- Unbuckle the seat belt.
- Unplug the AVILOO Box.
- Close the driver's door and, if necessary, the hood.
- The AVILOO BATTERY CERTIFICATE is sent via email to the address registered to the respective AVILOO Box.

Please note:

Changes or modifications not expressly approved by Aviloo could void the user's authority to operate the equipment. This is a mobile device and the user must ensure that they maintain a distance of 20 cm during operation.



Flashing green:
Data transfer.



Green light:
Test completed.

IMPORTANT NOTES

- To keep the software up to date, leave the box plugged into the power supply when not in use.
- Red LED means:
FLASH Test failed.

Take the following measures:

1. Check at <https://aviloo.link/database> whether the vehicle can be tested.
2. Repeat the FLASH Test according to the instructions.
3. Contact AVILOO Customer Management.

